คู่มือการใช้งาน

SMART 360° WIFI CAMERA

adjust the vision to look around your home.


ภาษาไทย




รายการสินค้าในกล่อง



กล้อง
Smart 360° wifi
x1




อุปกรณ์
จ่ายไฟ
x1



สาย
Micro USB
x1



เข็มกดปุ่ม
x1



ขายึด
x1



สกรู
x2



พุกพลาสติก
x2



คู่มือการใช้งาน
x1


คุณสมบัติการใช้งาน


1. รองรับการถ่ายภาพเคลื่อนไหวความละเอียดสูง 1080P High-defination
2. สามารถปรับมุมมองของกล้อง โดยสามารถปรับแนวนอนได้ 350°
   และแนวตั้ง100°
3. เชื่อมต่อด้วยระบบWifi

4. รองรับการเชื่อมต่อวีดีโอและสนทนาผ่านโทรศัพท์แบบ real-time และสามารถเชื่อมต่อได้หลายผู้ใช้งานพร้อมกัน
5. รองรับโหมด HD infrared night vision ให้คุณเห็นภาพได้ชัด แม้อยู่ในที่มืด
6. ใช้คู่กับLAMPTAN HOME แอพพลิเคชัน
7. รองรับการบันทึกข้อมูลลงSD Card
8. มีโหมดตรวจจับความเคลื่อนไหวและเสียง
9. *รองรับการจัดเก็บข้อมูลบน Cloud ได้ตลอดเวลา

*มีค่าใช้จ่ายเพิ่ม(ดูข้อมูลได้ในLAMPTAN HOME APP)

รายละเอียดสินค้า

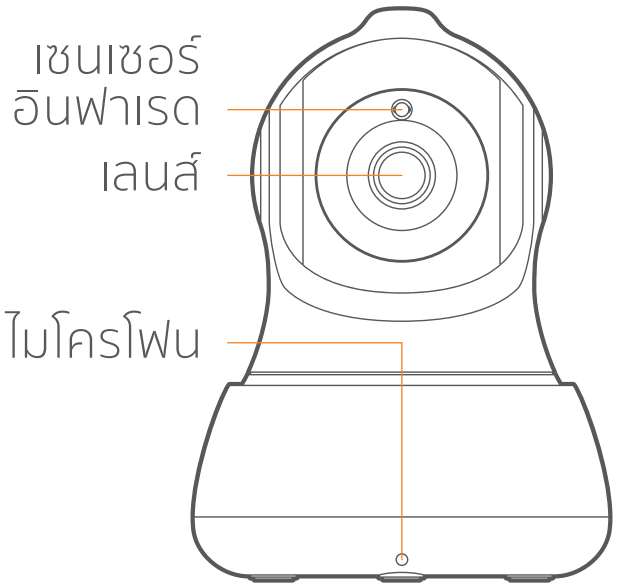

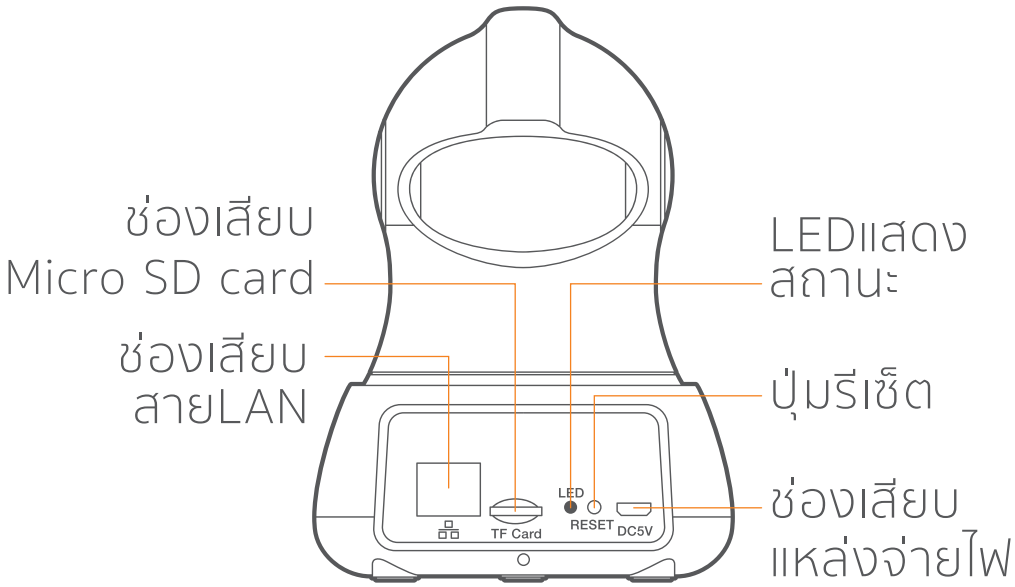

- ชาร์จไฟด้วย USB ผ่านAdaptor
- รองรับ Micro SD card สูงสุด 64GB
- รีเซ็ตโดยกดปุ่มรีเซ็ตค้างไว้ 8 วินาที (กรณีรีเซ็ตใหม่ต้องทำการลบอุปกรณ์ในAppก่อน กดปุ่มรีเซ็ตทุกครั้ง)

ข้อมูลสินค้า

ขนาดสินค้า : 108*102*139mm

SD Card : สูงสุด 64GB

แรงดันไฟฟ้าขาเข้า : DC 5V/2A

คุณภาพภาพเคลื่อนไหว : 1080P@15fps

เซ็นเซอร์รูปภาพ : 1/2.7” CMOS sensor

เลนส์ : 110 องศา angles view (FOV)

IR-Cut(ปรับแสงเพื่อภาพที่คมชัดขึ้น) : ติดตั้งในอุปกรณ์

IR พารามิเตอร์ : ระยะ10เมตร

จับภาพเคลื่อนไหว : รองรับ

Wi-Fi : 802.11 b/g/n

องศาการมองเห็น : แนวนอน 350˚ ; แนวตั้ง 100˚

การติดตั้ง : ตั้งบนชั้นโต๊ะหรือยึดติดกำแพง

อุณหภูมิในการทำงาน : -10˚C~ 50˚C˚


การแสดงผลของLED

- สีแดง : อุปกรณ์เริ่มทำงาน
- สีฟ้ากระพริบ : กำลังหาเชื่อมต่อWifi
- สีฟ้า : เชื่อมต่อสัญญาณเสร็จสิ้น
- สีแดงและสีฟ้ากระพริบสลับกัน : กำลังทำการตั้งค่า กรุณาอย่าปิดเครื่อง

ขั้นตอนการใช้งาน


ขั้นตอนที่ 1

ต่ออุปกรณ์กับแหล่งจ่ายไฟ

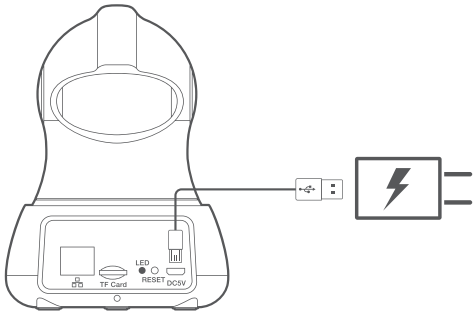

ขั้นตอนที่ 2

ดาวน์โหลด LAMPTAN HOME application ลง smartphone ของท่าน

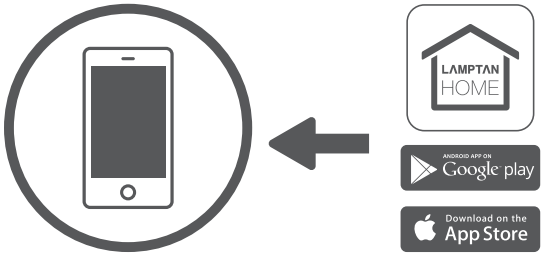

ขั้นตอนที่ 3

กดปุ่มรีเซ็ตค้างไว้ 8 วินาที เพื่อเริ่มต้นการตั้งค่า

ขั้นตอนที่ 4

เข้าแอพพลิเคชัน แล้วทำการเชื่อมต่อโดยสแกนQR code ใต้กล้องหรือทำตามขั้นตอนแนะนำในแอพพลิเคชัน

ขั้นตอนที่ 5

เริ่มต้นการใช้งาน

แสกนQR Codeเพื่อดาวน์โหลดแอพพลิเคชัน

LAMPTAN HOME

Download on the App Store

ANDROID APP ON Google play

วิธีการติดตั้ง

สามารถติดตั้งได้ 2 วิธี


วิธีที่ 1

วางบนโต๊ะ ชั้นวาง หรือพื้นที่ว่าง โดยไม่ต้องทำการยึด


วิธีที่ 2

เลือกผนังที่เรียบและสะอาดทำการติดตั้งขายึดกับกำแพงด้วยสกรูและพุกพลาสติก จากนั้นทำการติดตั้งกล้องกับขายึด และทำการปรับมุมกล้องตามต้องการ

วิธีที่ 1

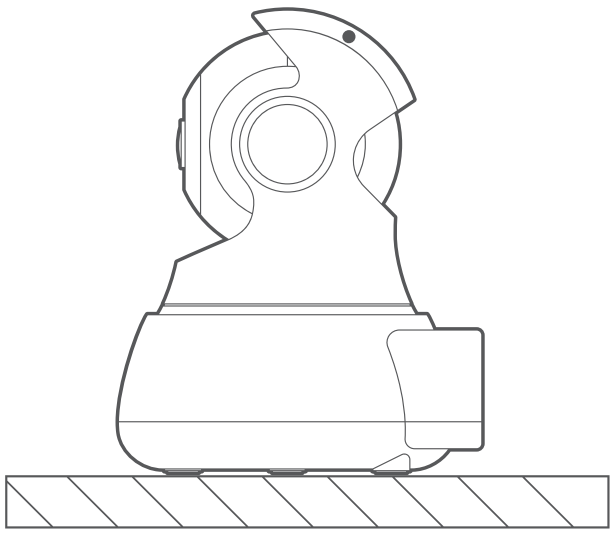

วิธีที่ 2

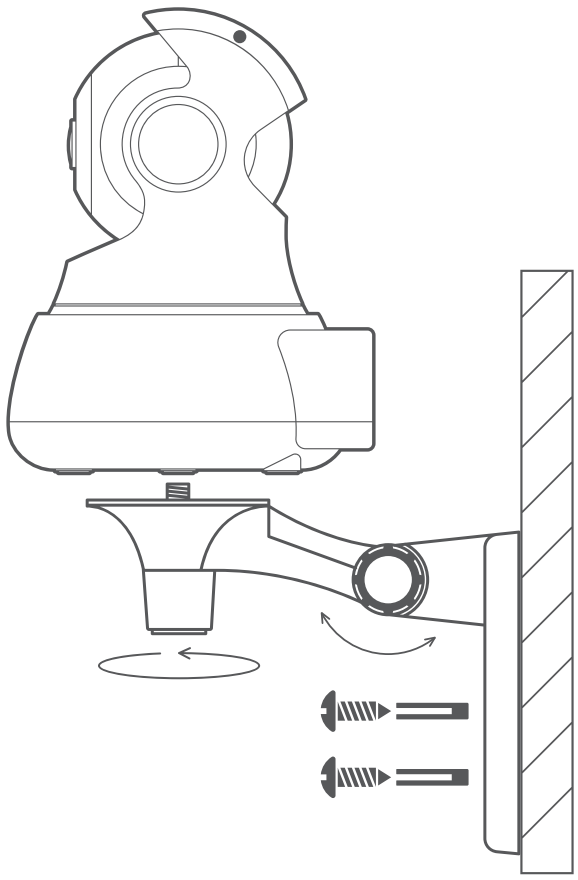

วิธีลบหรือตั้งค่าใหม่

1. เข้า LAMPTAN HOME App
2. เข้าที่Smart wifi camera ที่ต้องการลบหรือตั้งค่าใหม่
3. กด Setting ที่รูปเฟืองมุมบนขวา
4. กด “Delete”
5. กด “Delete” อีกครั้งเพื่อยืนยันการลบ
6. กดปุ่ม Reset ที่ด้านหลัง Smart wifi camera

หมายเหตุ

1. ห้ามทำการกดปุ่มReset ที่ด้านหลัง Smart wifi camera ก่อนทำการลบอุปกรณ์ในApp

2. ต้องทำการลบSmart wifi camera ในApp ก่อนทำการ Delete Family ทุกครั้ง

ข้อกำหนดของ SD Card

• Class4ขึ้นไป • ความจุไม่เกิน64GB • รูปแบบFAT32

บริการและรับประกันหลังการขาย

1. การรับประกัน ภายในระยะเวลา 1 ปี นับจากวันที่ซื้อ โดยนำใบเสร็จรับเงิน / ใบกำกับภาษีมาแสดง ถ้าซื้อสินค้าภายใน 7 วัน แล้วเกิดสินค้ามีปัญหา ทางบริษัทฯ ยินดีเปลี่ยนสินค้าชิ้นใหม่ให้ ถ้าทางบริษัทฯไม่มีสินค้าในคลังสินค้า ทางลูกค้าต้องรอสินค้า และสินค้าต้องไม่อยู่ในสภาพ แตก หัก หรืออยู่ในสภาพไม่ปกติ

2. การรับประกัน จะไม่ครอบคลุมข้อบกพร่อง หรือความเสียหายจากสาเหตุต่อไปนี้
   a. การใช้งานไม่ถูกต้อง หรือนำสินค้าอยู่ในสภาพที่ไม่เหมาะสมกับการใช้งานที่ผิด หรือนอกเหนือจากข้อแนะนำ การใช้ในคู่มือการใช้งาน
   b. การซ่อม หรือ ดัดแปลง แก้ไข โดยบุคคลภายนอกที่มิใช่ช่างของบริษัทฯ
   c. นำสินค้า ชิ้นส่วนหรือซอฟท์แวร์ของบุคคลอื่นมาใช้ร่วมกับสินค้า
   d. หากสินค้า ชำรุด หรือ เสียหาย อันเกิดจากการใช้งานผิดวิธี หรือการต่ออุปกรณ์ผิดวิธี การใช้แรงดันไฟไม่ตรงกับมาตรฐานของสินค้าและการใช้งานผิดประเภทที่มีเขียนไว้ในฉลากสินค้า

LAMPTAN SMART HOME SOLUTION

LINE @lamptan

ขอขอบพระคุณที่เลือกแลมป์ตั้น

บริษัท แลมป์ตั้น ไลท์ติ้ง (2001) จำกัด
3 ซอยเทียนทะเล19 ถนนบางขุนเทียน-ชายทะเล
แขวงท่าข้าม เขตบางขุนเทียน กรุงเทพ 10150
ฝ่ายบริการลูกค้า : 0-2451-2968-9

www.lamptan.co.th
facebook.com/lamptanlighting

QUALITY CONTROLLED BY LAMPTAN THAILAND

User Guide

SMART 360° WIFI CAMERA

adjust the vision to look around your home.

English




Packing list



Smart 360˚ wifi camera x1




Adaptor x1



Micro USB Power cable x1




Reset Pin x1



Mounting bracket x1



Screws x2



Plastic expansion bolt x2



User guide x1


Function Description


1. Support 1080P High- definition Video Recording.
2. Support monitoring with the range of 350°horizontally and 100°vertically
3. Support Wi- Fi Smart Connection.

4. upport real- time video via mobile phone and 2- way talk- back, enabling your communication with family members.
5. Support night vision, human body detection and malfunction alarm to safeguard your family.
6. Support LAMPTAN HOME application
7. Supported Micro SD Card data saving.
8. Provide motion and vibrate of sound detecting
9. *Support 7*24 ongoing Cloud Storage and remote control and view;

*Additional fee: cloud storage services.(Find it in the LAMPTAN HOME application)

Product Description

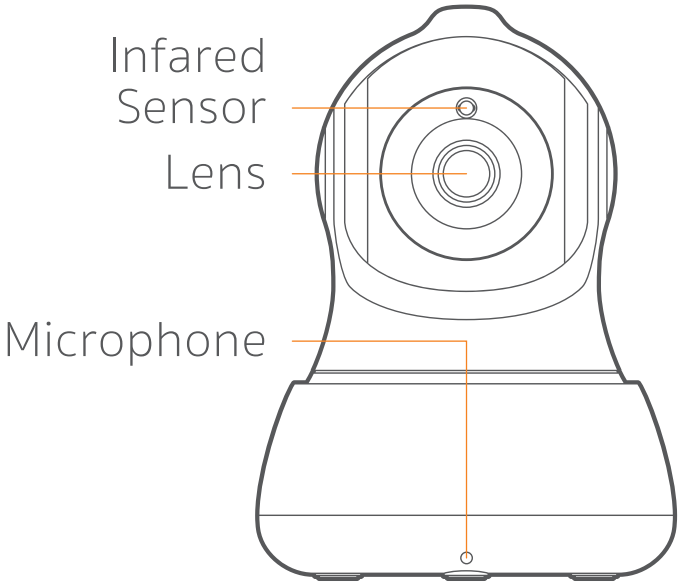

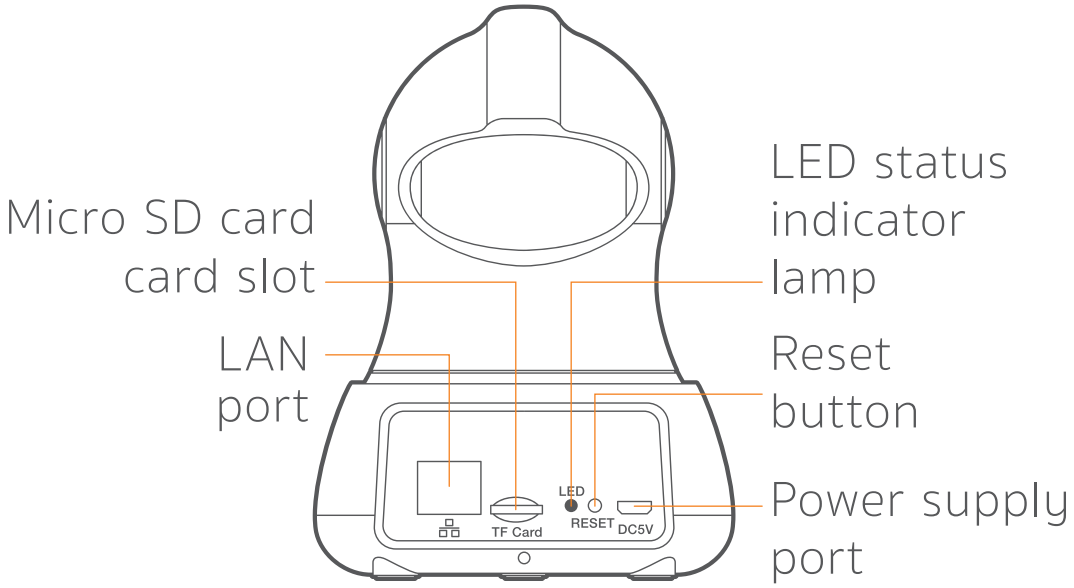

- USB Power Supply : External Power Supply
- Micro SD Card Slot : Support micro SD card Max 64GB

- Keep pressing Reset button for 8s to restore primary setting.

(Please relieve the original binding account and change another binding account for the camera.)

Specification

Product Size : 108*102*139mm

SD Card : Max 64GB

Power Input : DC 5V/2A

Video Quality : 1080P@15fps

Image Sensor : 1/2.7” CMOS sensor

Lens : 110 degrees angles view (FOV)

IR-Cut : Built-in

IR Parameters : IR Distance of 10M

Motion Detection : Support

Wi-Fi : 802.11 b/g/n

Field of View : Horizontal 350˚ ; Vertical 100˚

Installation : Desktop Stand or Wall mounting

Operating Temperature : -10˚C~ 50˚C˚


LED States

- Red ON : Power on.
- Blue flashing : Network connecting.
- Blue ON : Network is successfully connected.
- Red and Blue Indicator flashing : System upgrading, do not power off.

Operation Guide


Step 1

Connect the product to power supply.

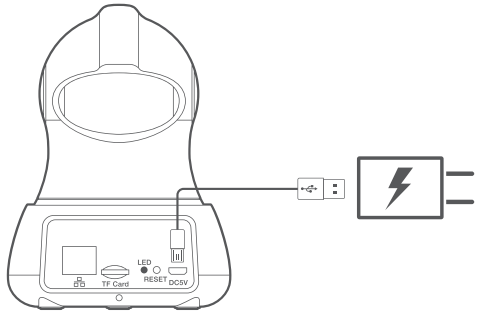

Step 2

Download LAMPTAN HOME application on your smartphone.

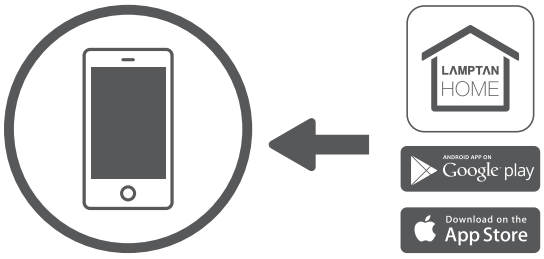

Step 3

Keep pressing Reset button for 8s to restore primary setting.

Step 4

Enable APP; you can scan QR Code from the bottom of the camera or add intelligent product according to the route guide.

Step 5

Enjoy your camera.

Scan QR Code for downloading **LAMPTAN HOME** application

Download on the App Store

ANDROID APP ON Google play

Installation Tips

can install 2 options


Option 1

directly on desktop or other place, do not need to use the bracket.


Option 2

Choose clean and flat wall, and then mount the bracket on the wall with the screws. Then fix the camera on the base of the bracket and adjust camera angle.

Option1

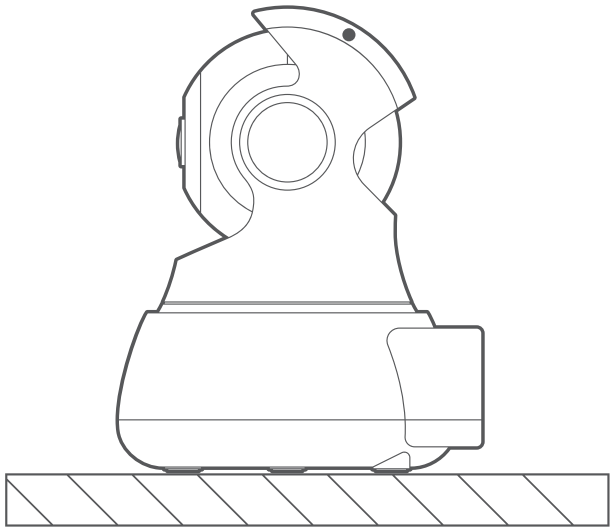

Option2

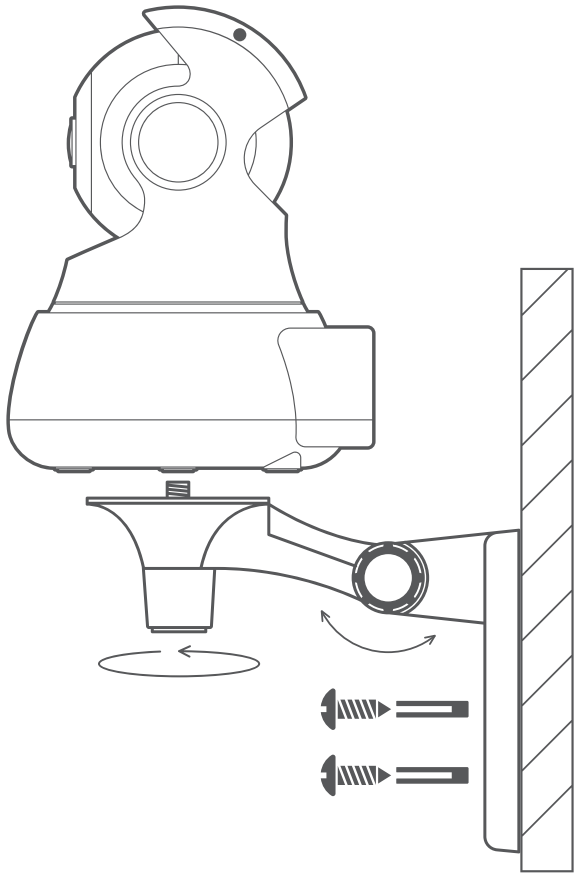

How to reset Smart wifi camera

1. Go to LAMPTAN HOME App
2. Choose Smart wifi camera you want to delete or reset
3. Go setting by touch gear icon at top corner
4. Choose “Delete”
5. Choose “Delete” again for confirm delete device
6. Push reset button at back side of Smart wifi camera

Remark

1. Do not push reset button at back side of Smart wifi camera before delete device in App.

2. Always delete Smart wifi camera in App before Delete Family.

SD Card requirements

• Require Class4 minimum • Less than 64GB • Format FAT32

Warranty and after-sales service

1. Warranty period shall be valid for 1 year since the date of purchase, it's subject to purchase invoice. For any malfunction caused by inferior quality (normal usage), the company will repair it for you free of charge. Meanwhile, exchange of goods (due to quality problem) is available to you within 7 days.
2. Exceptions are as follows:
   a. Any malfunction or defect caused by improper usage conditions or environment.
   b. Any malfunction or defect caused by improper installation, usage, unauthorized maintenance, modification, force majeure or external causes.
   c. Any malfunction or defect resulted from applying any third- party product, software or component.
   d. Any malfunction or damage not caused by the product's design, technology and quality etc.

LAMPTAN SMART HOME SOLUTION

LINE
@lamptan

Thank you for choose LAMPTAN

LAMPTAN LIGHTING (2001) Co.,LTD
3 Soi Thianthale 19, Bangkhunthian- Chaithale Rd.,
Thakarm, Bangkhunthian, Bangkok 10150
Customer Service : 0-2451-2968-9
www.lamptan.co.th
facebook.com/lamptanlighting

QUALITY CONTROLLED BY LAMPTAN THAILAND